Dockboard Options

Standard

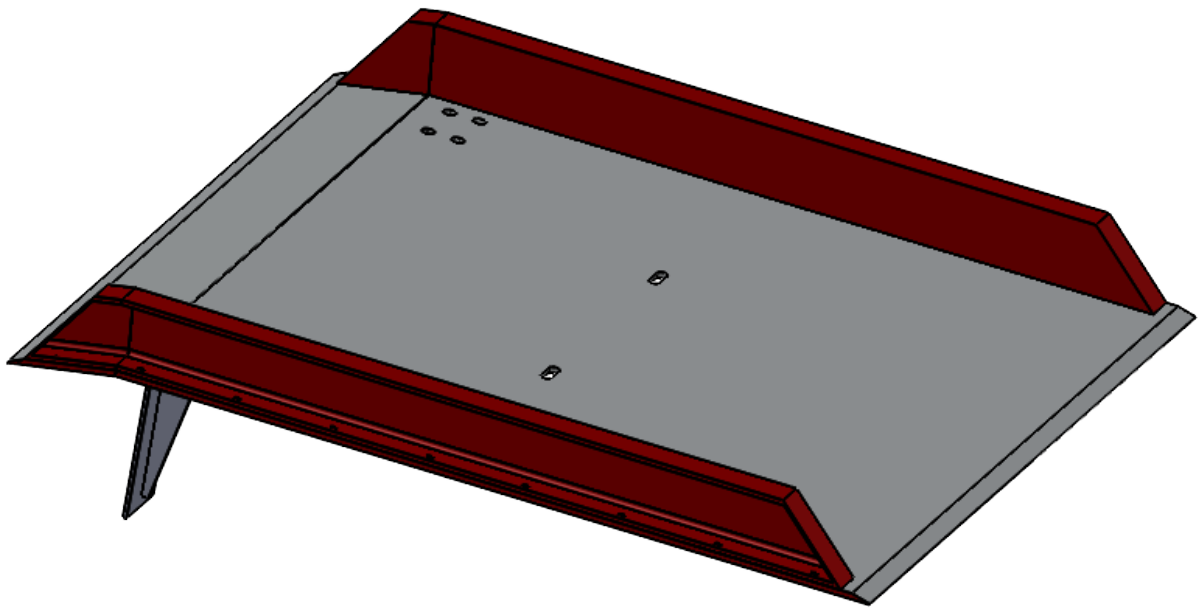

Standard Dockboard features:
- Anti-slip treadplate finish
- Crowned (10˚) & bevelled for smooth operation
- One pair of locking legs to prevent movement
- Steel safety side curbs

Fork Truck Lifting Handles (FTH-1)

- Stongly recommended for all Dockboards due to weight

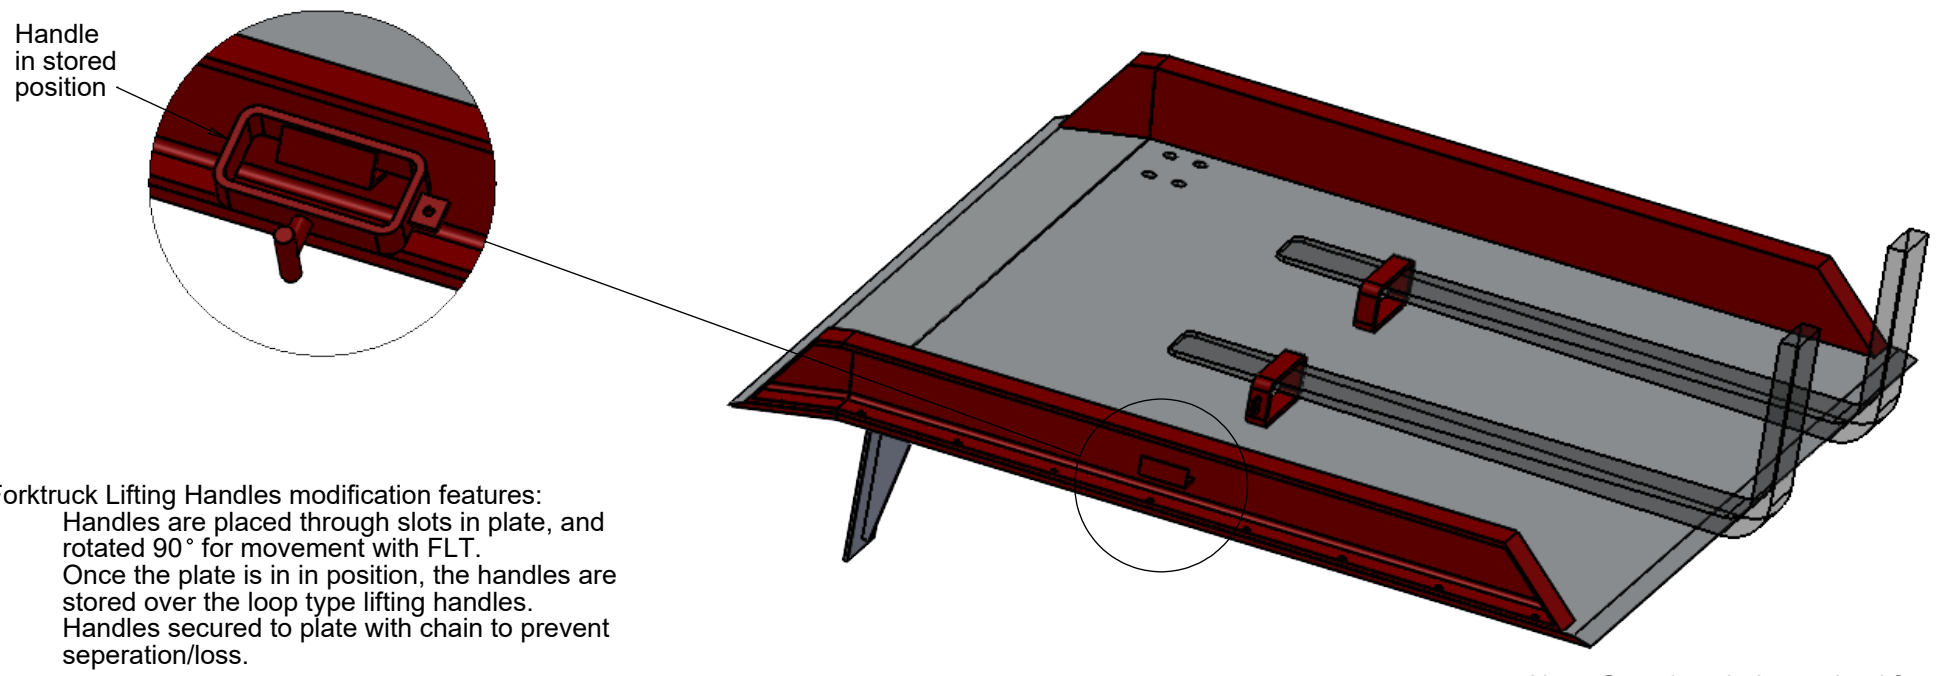

Forktruck Lifting Handles modification features:
- Handles are placed through slots in plate, and rotated 90˚ for movement with FLT.
- Once the plate is in in position, the handles are stored over the loop type lifting handles.
- Handles secured to plate with chain to prevent seperation/loss.

Note: Securing chains omitted for clarity.

Fixed Span Locking Legs (FSL-1)

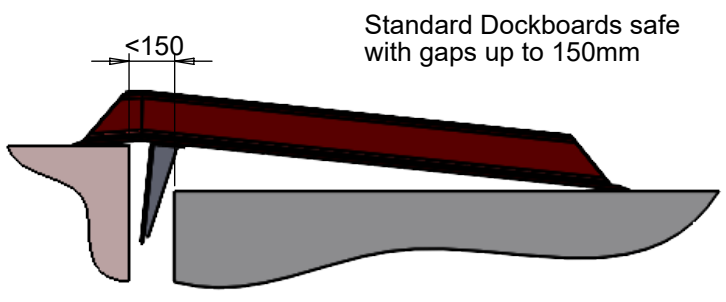

Standard Dockboards safe with gaps up to 150mm

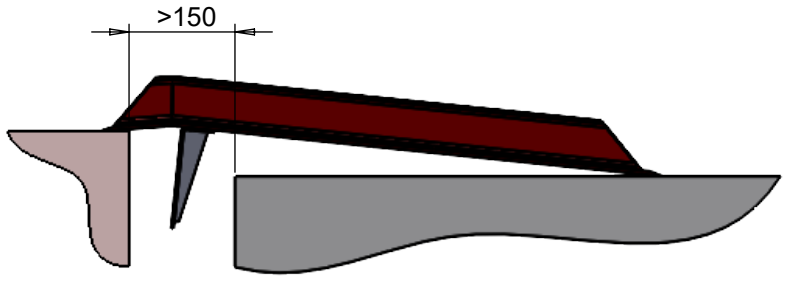

Over 150mm there is a significant risk of the board separating from vehicle - this is not recommended.

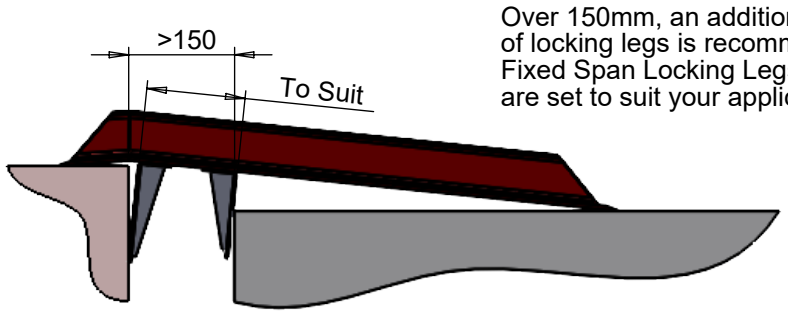

Over 150mm, an additional pair of locking legs is recommended. Fixed Span Locking Legs (FSL-1) are set to suit your application.

THORWORLD
THE LOADING BAY EQUIPMENT AND RENTARAMP SPECIALISTS

Contact us now for assistance selecting the correct equipment for your application.

Telephone: +44 (0) 1246 260981 Fax: +44 (0) 1246 260493 Email: info@thorworld.co.uk